Preparation

If you are a beginner to paper modeling please read the „Building Tips.pdf“ file to learn what is required to build paper models safe and easy.

Before you begin, make sure you read the instructions and also have a look at the PDF file to understand the layer structure. Make sure to choose the print options you want for your build!

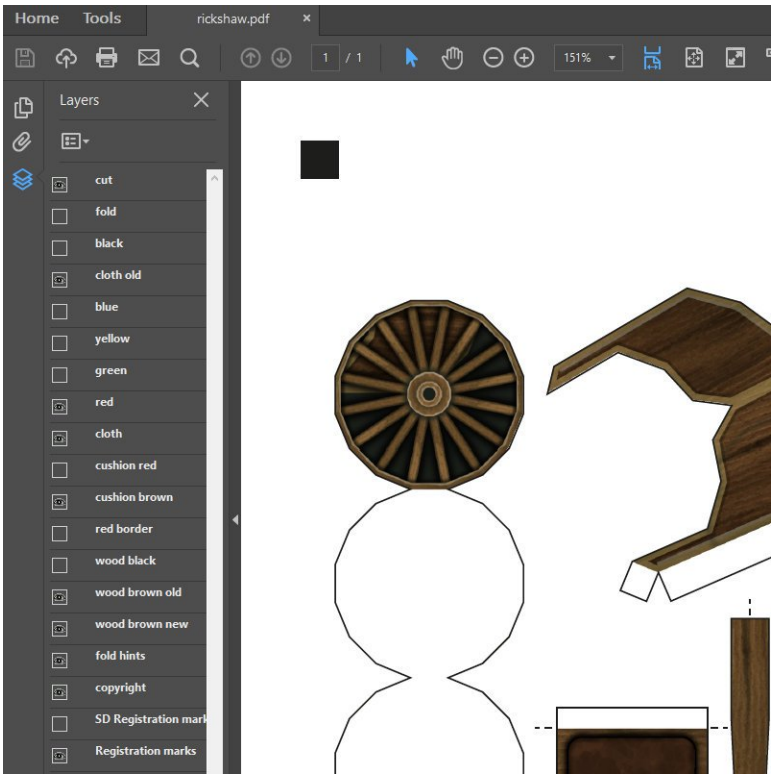

In this case I have unselected the fold lines but selected the fold hints layer which makes markings on the outside so you still know where to score for fold lines but don't have the dotted lines across the textures.

In a similar way choose the wood and cloth colors you like or require.

Rickshaw

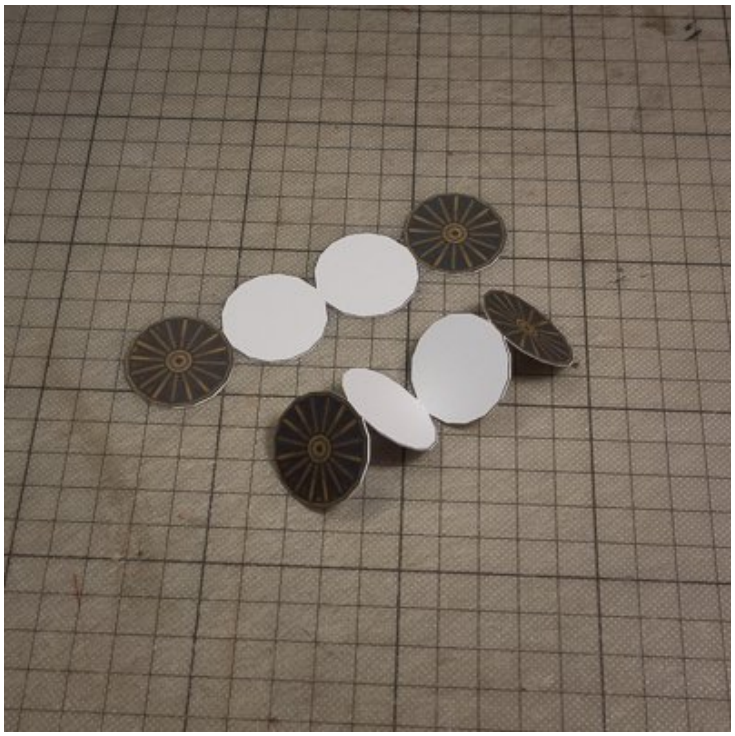

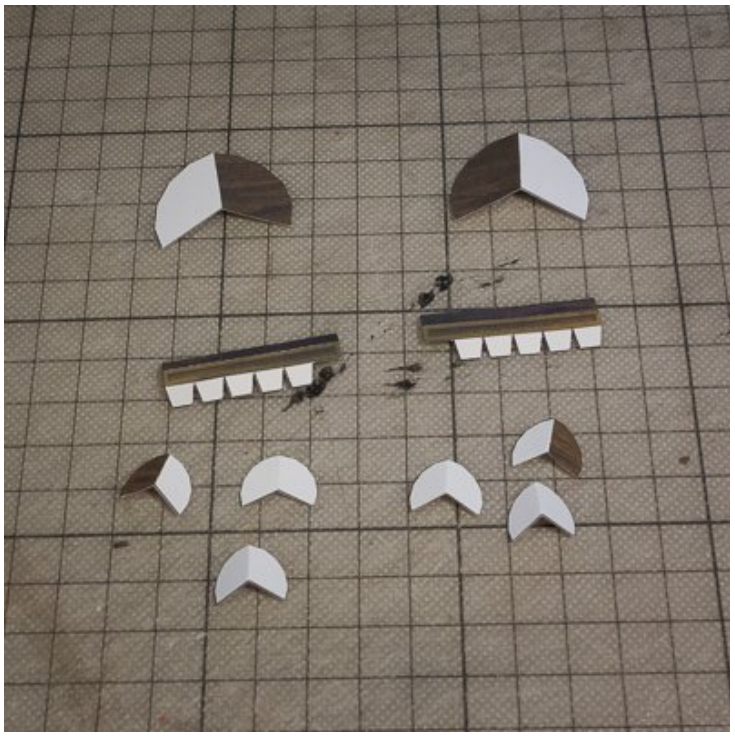

Start by preparing and glueing the wheels so that they have time to dry. Then prepare the parts for the mudguards of the wheels)

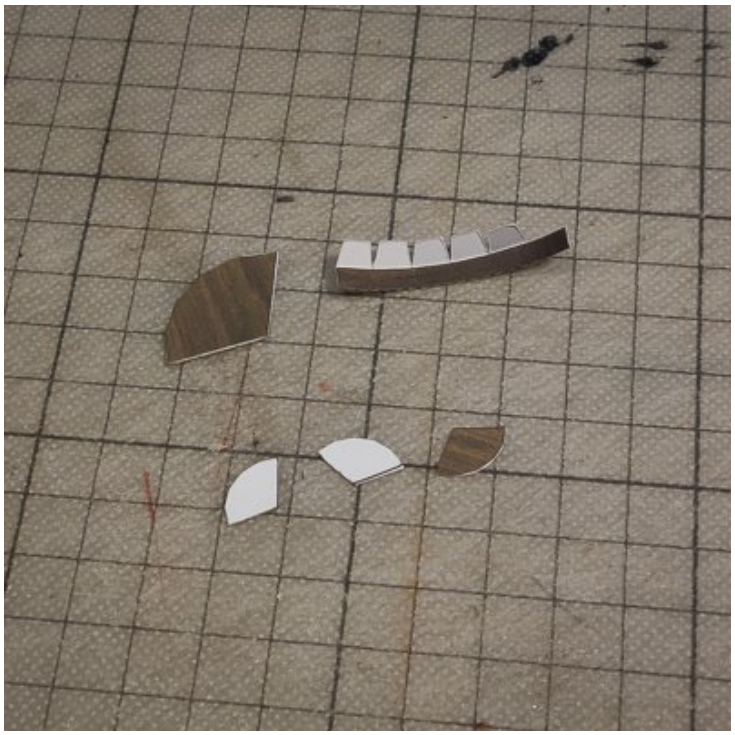

Glue as shown and let dry.

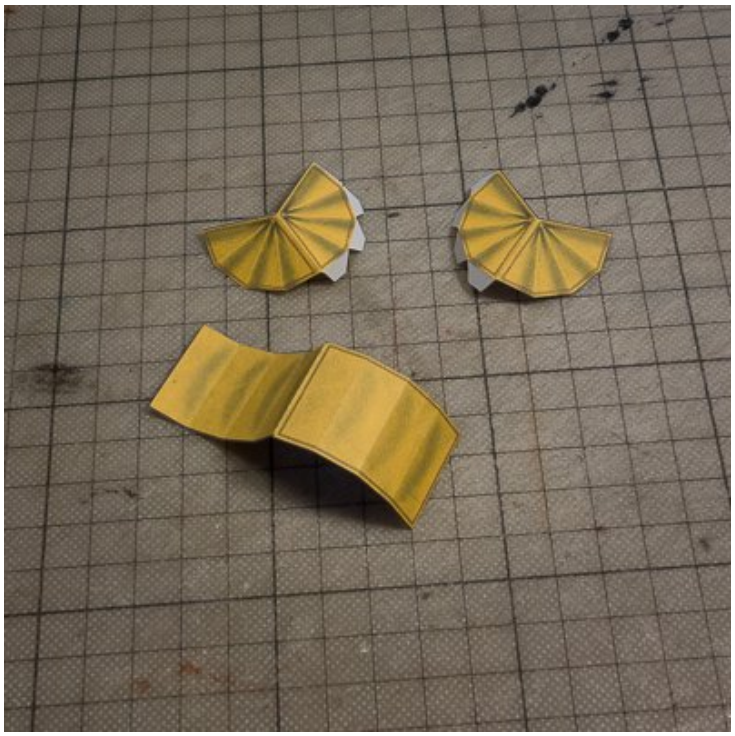
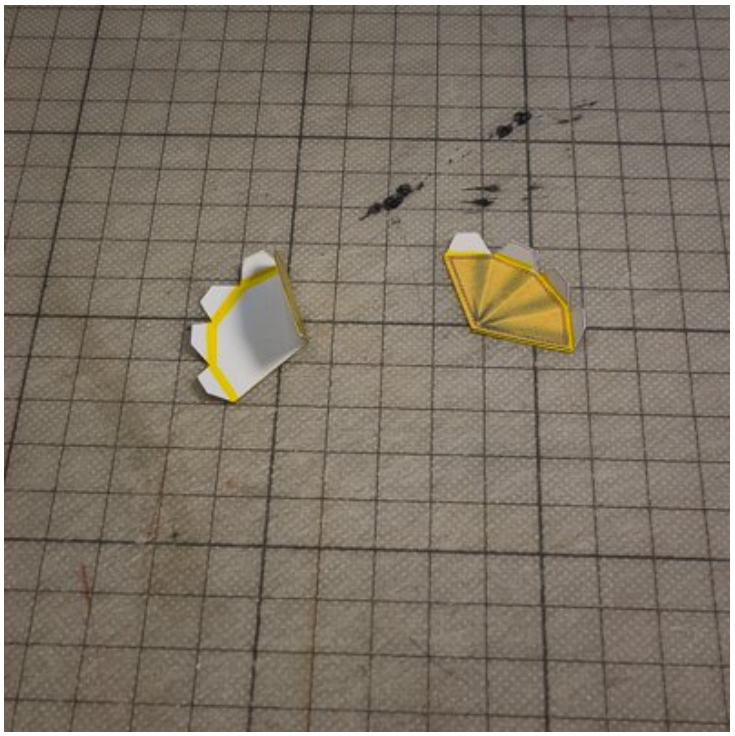

Next prepare the parts for the cloth roof (if you plan on using it). Glue the sides first.

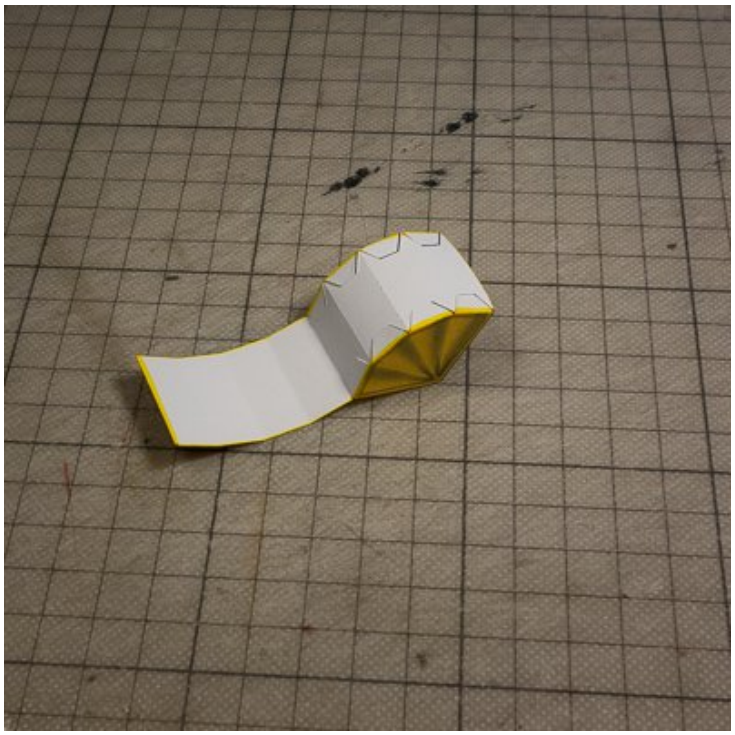
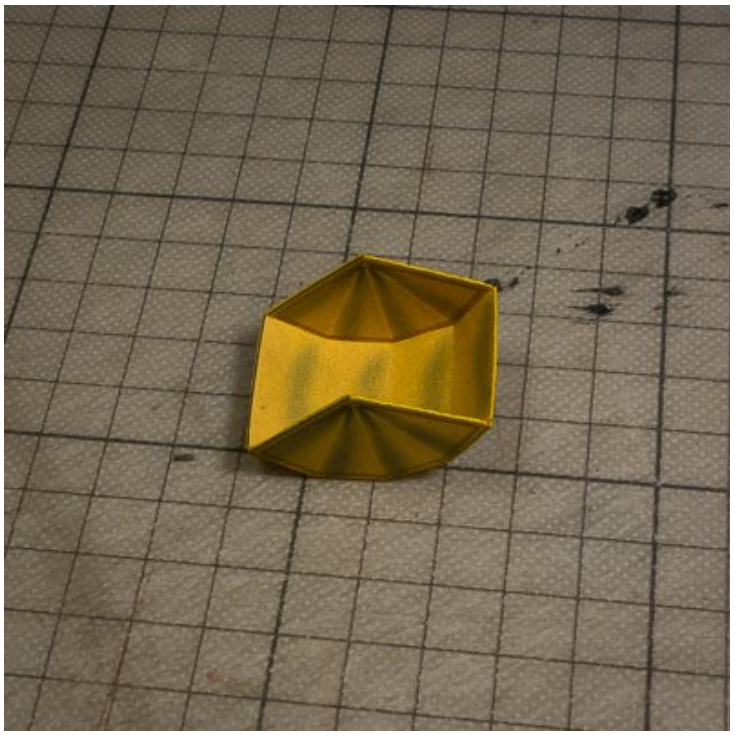

The glue the sides to the roof part as shown and finaly close the roof.

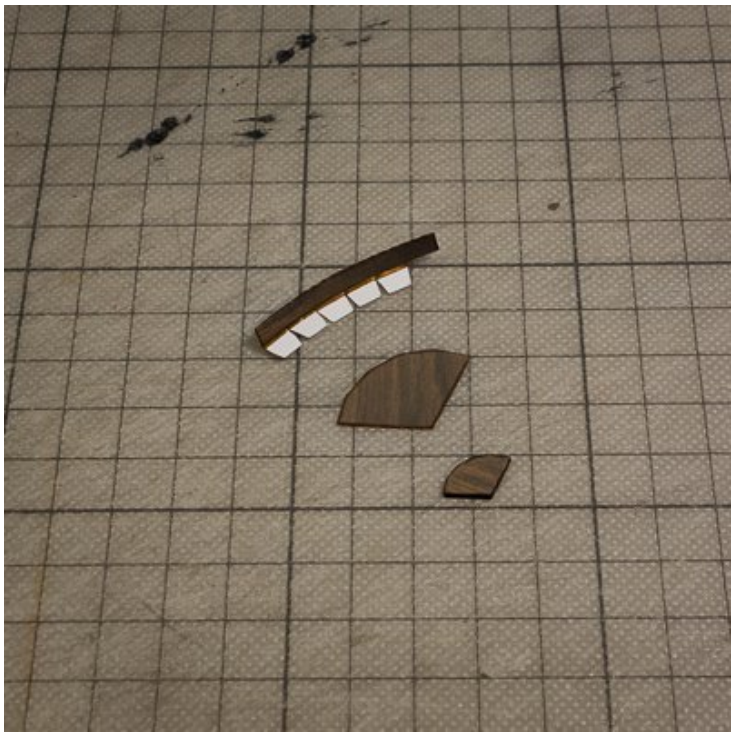

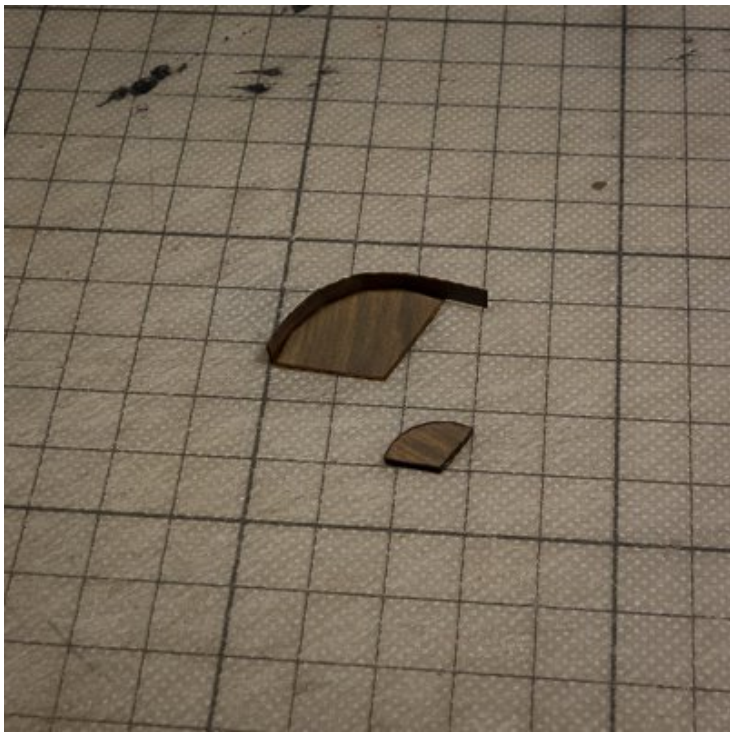

When the mudguard parts are dried, glue the top to the large side part as shown. The small part is just to allow for some space between the wheels and the side. Can be skipped if you don't need this realism detail.



But if you want it, glue it in place as shown.



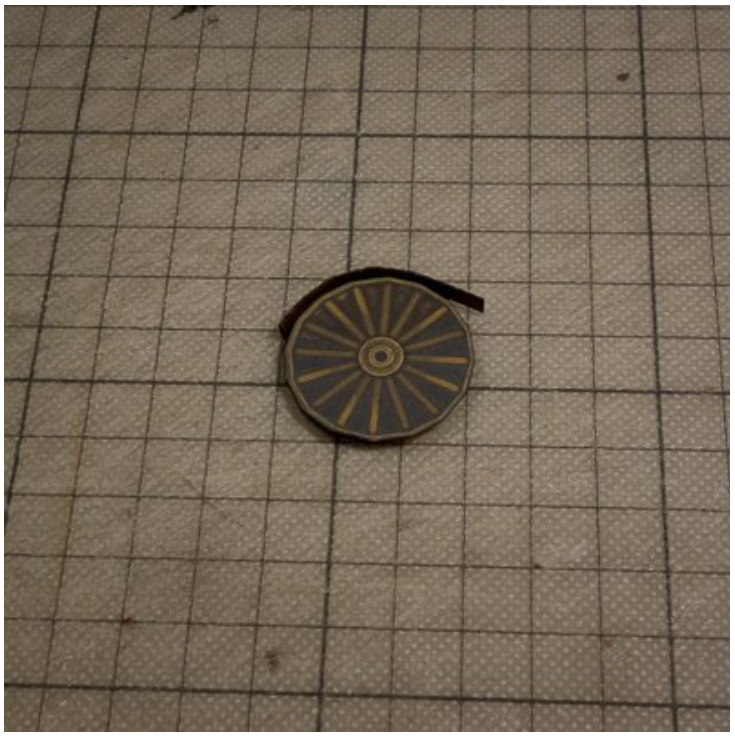

Glue the wheel to the mudrail side part. Take care to have the wheel side with the texture of the wagon side showing on the outside. Align this texture where the wagon side would look through. If you want more detail, cut out the black between the spokes!

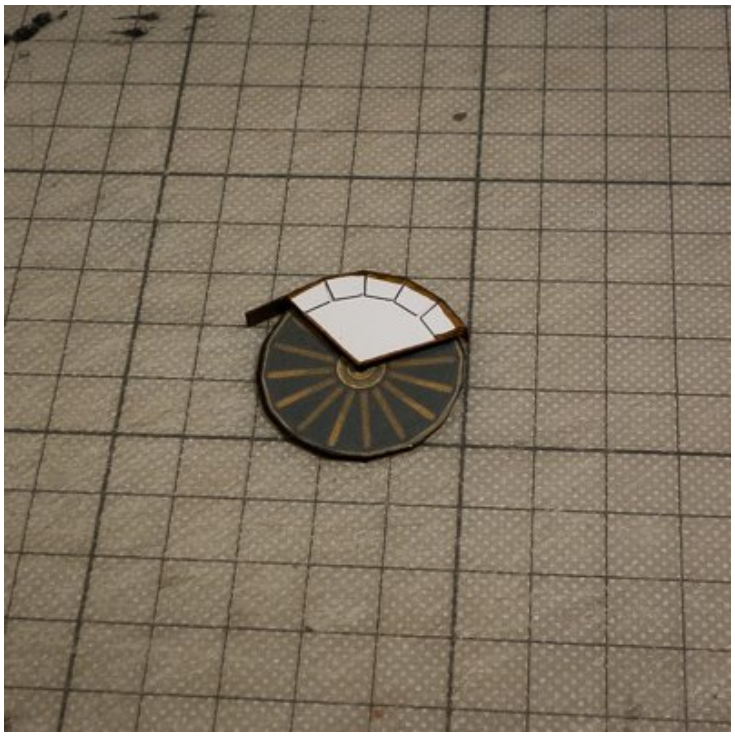

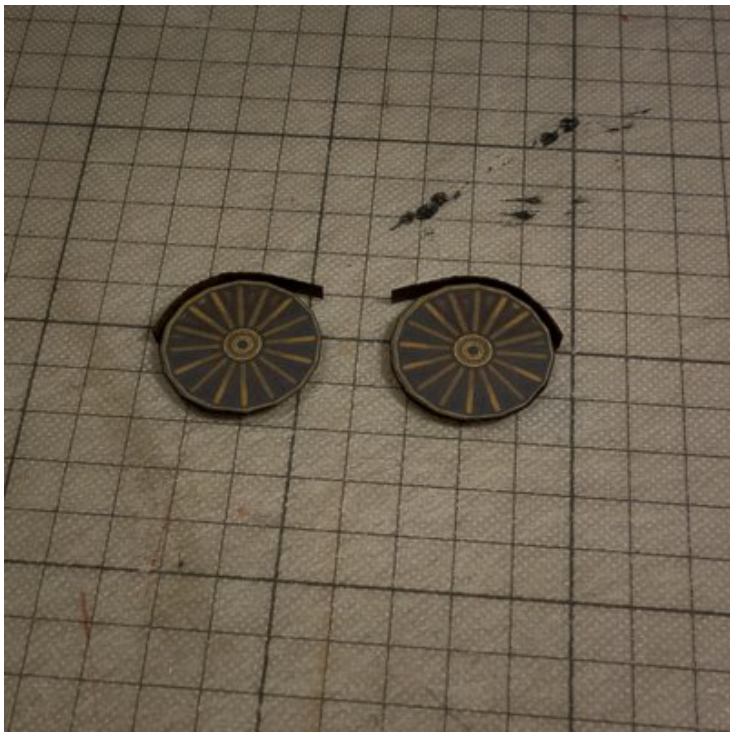

Use the back to position the wheel center at the right point. Repeat for the other side.

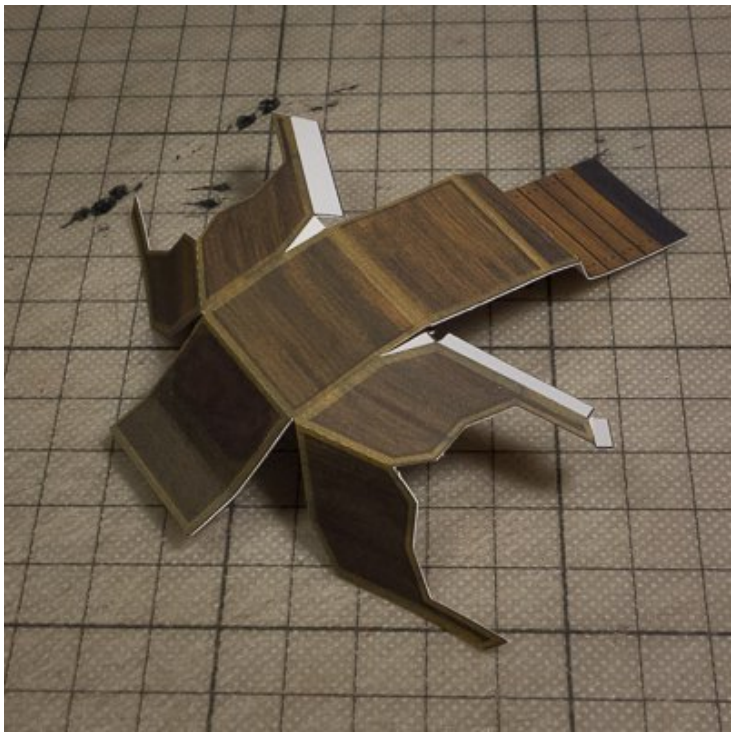


For the main body, prepare as shown and then glue the side insides.

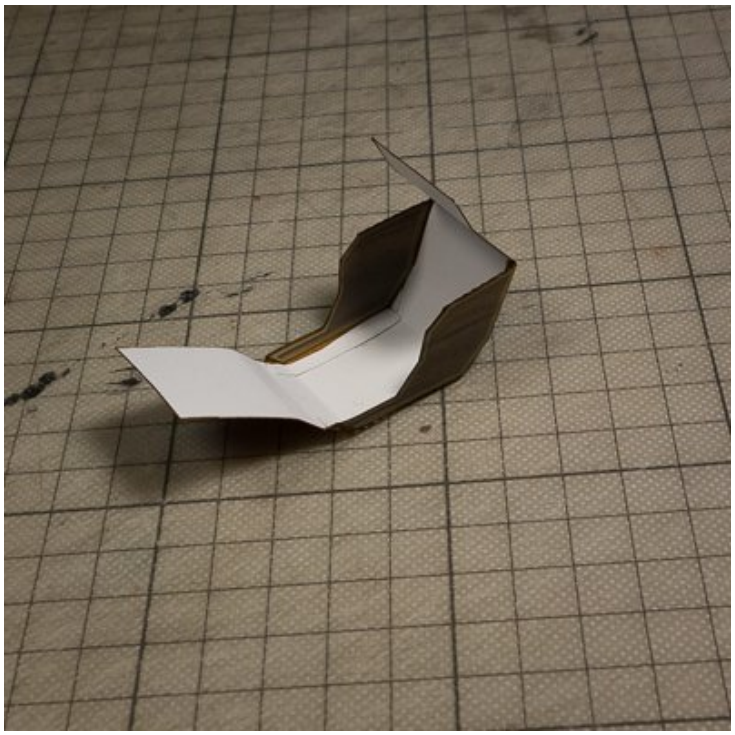
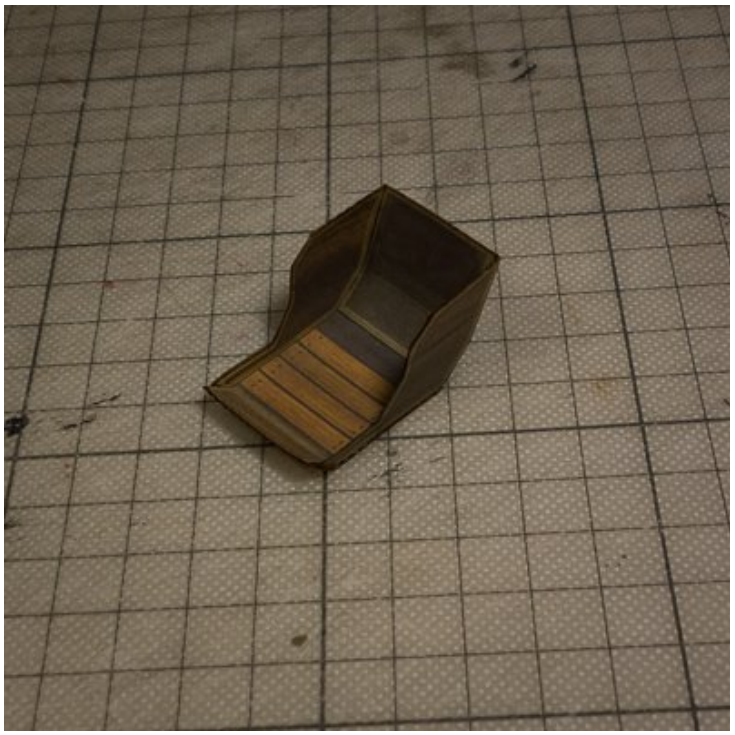

Next glue the sides to the main part and finally glue the inside flaps in place.

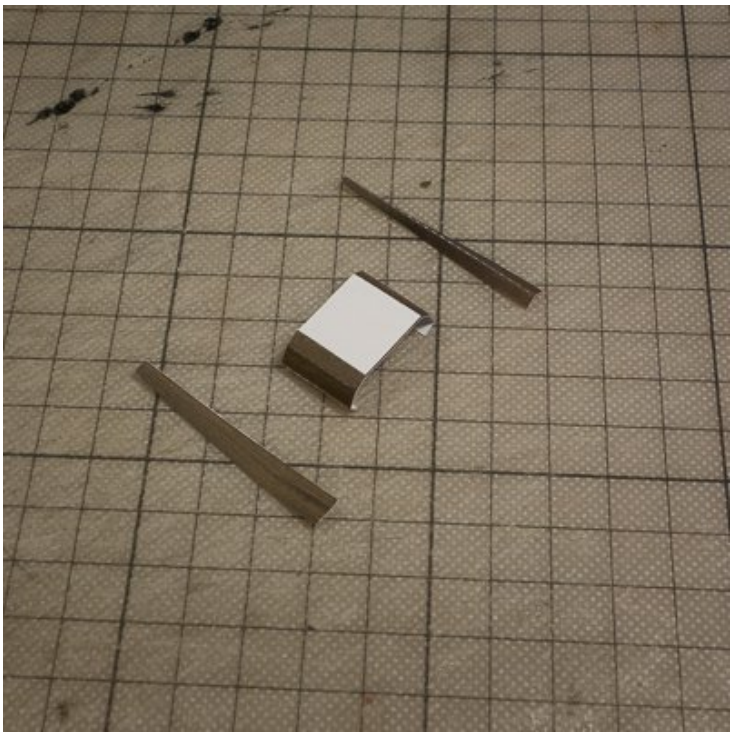

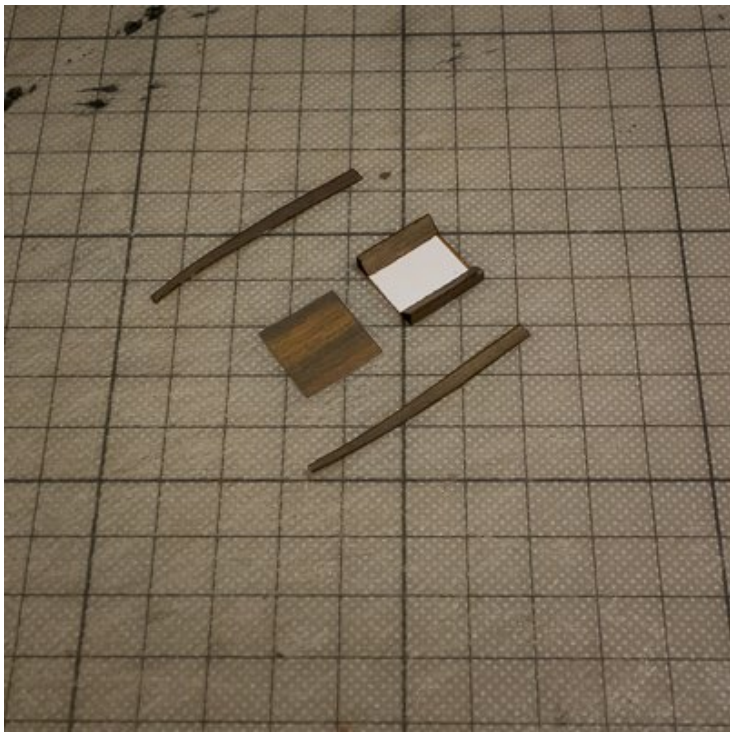

For the handles prepare these parts and glue as shown.

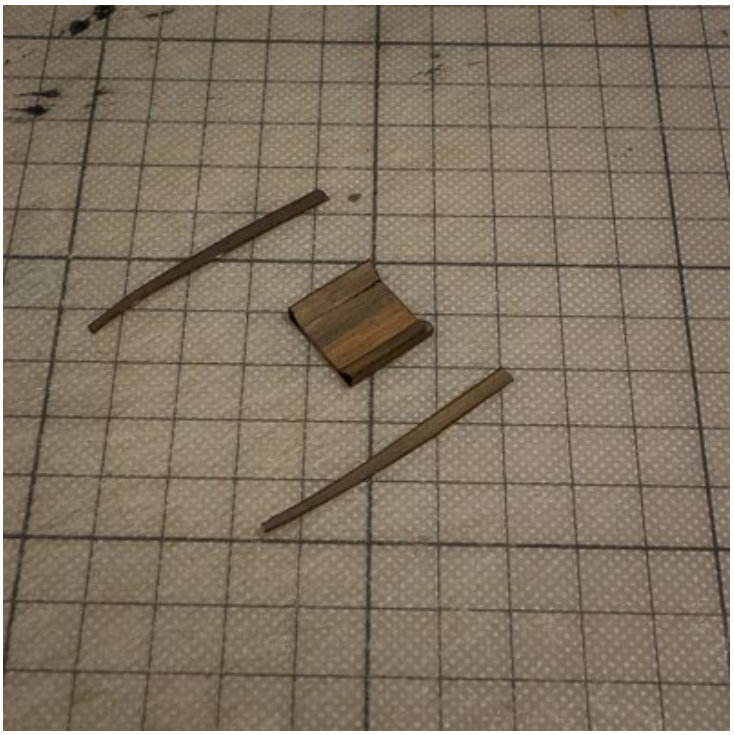

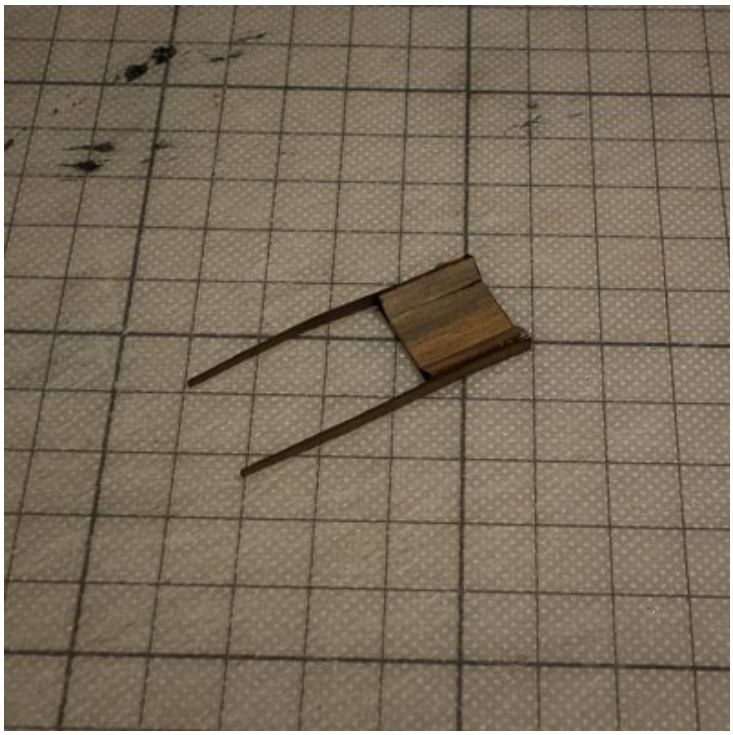

Trim the top cover part and glue in place. Finally glue the handles to the sides.

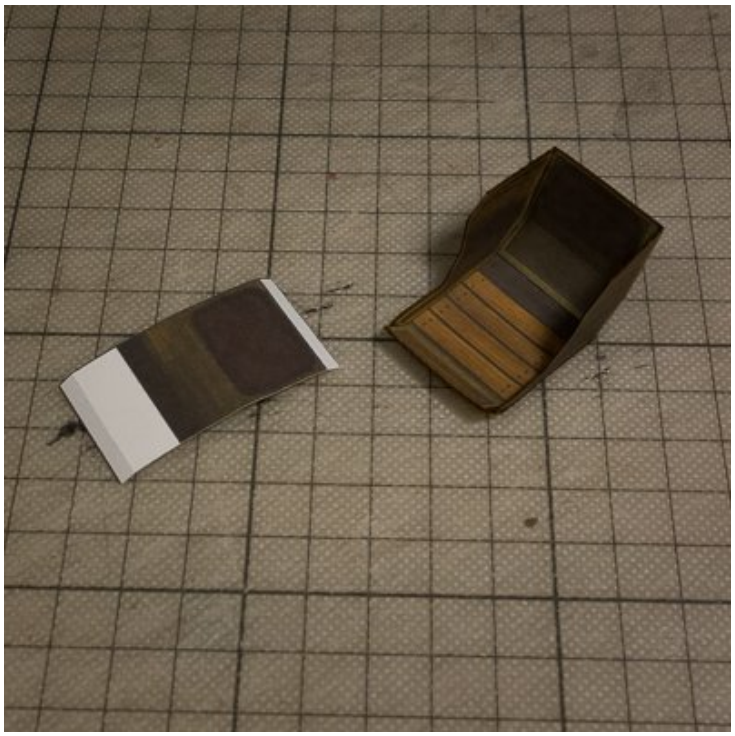

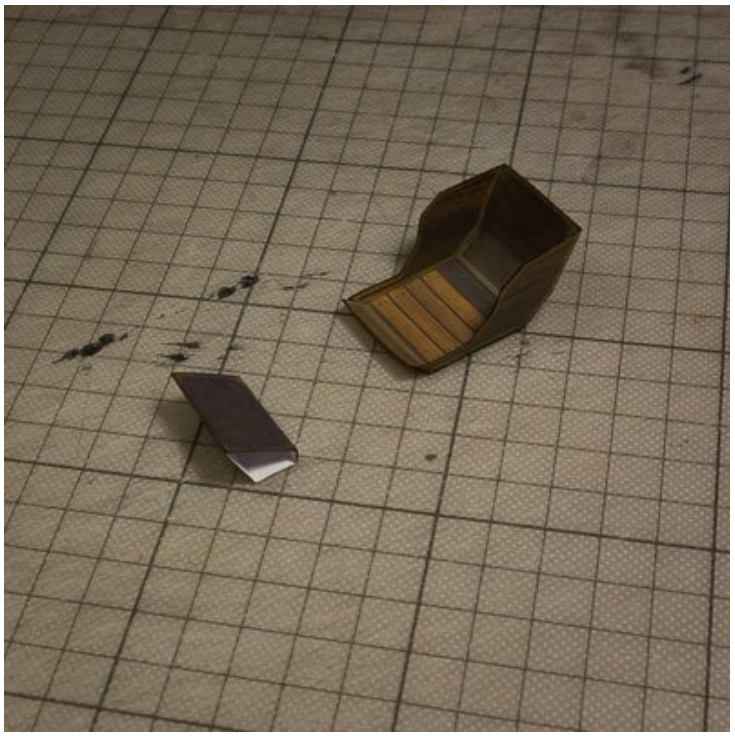

Prepare the seat part and glue at the narrow flaps.

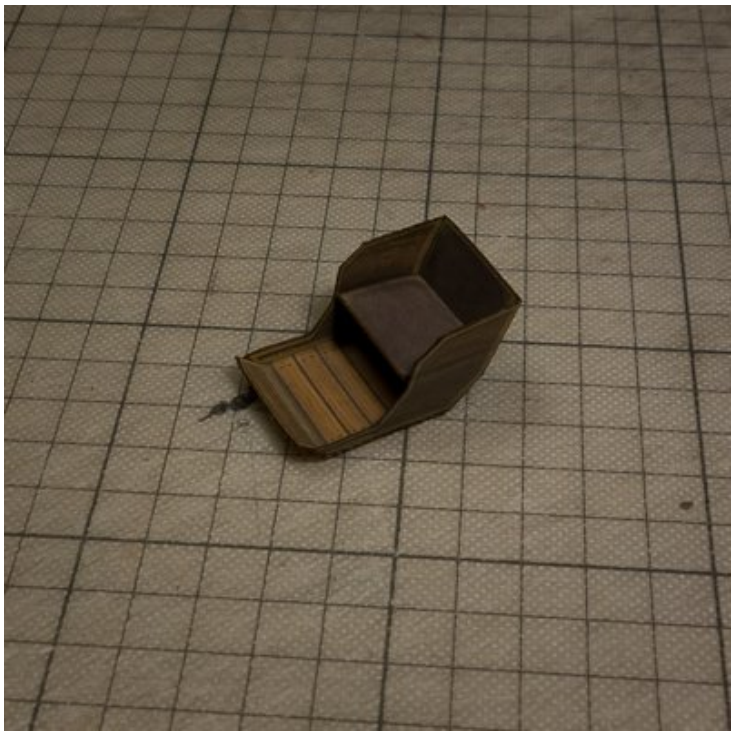

The glue to the back sides of the main hull.

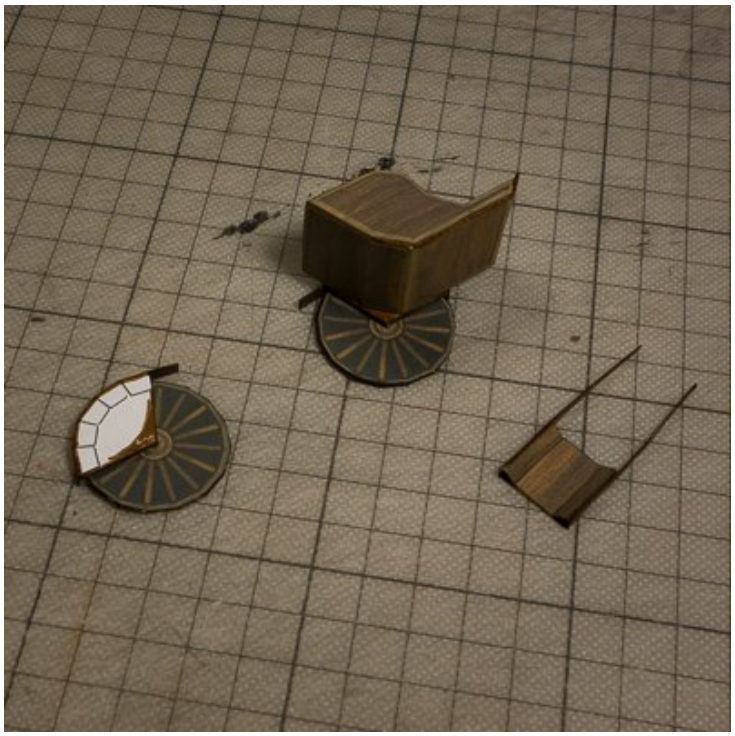

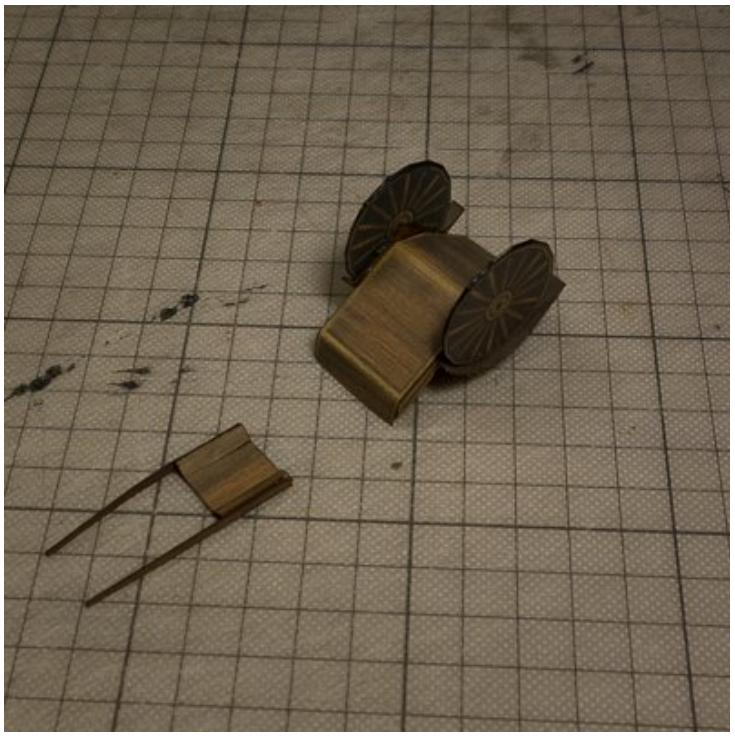

Now glue it all together. Glue the wheel sides to the main hull as shown, aligning with the bottom and back plane.

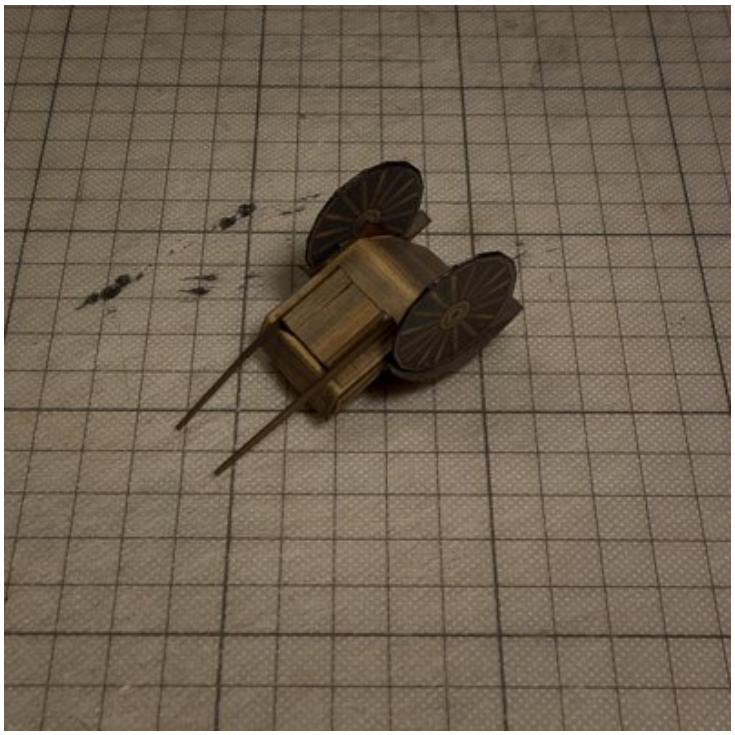

Finally glue the handles part to the main hull.

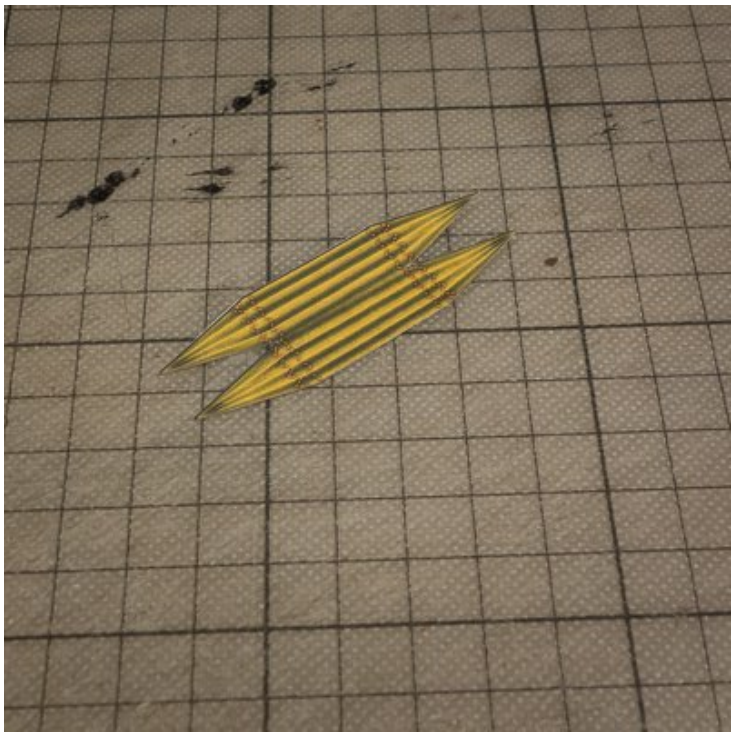

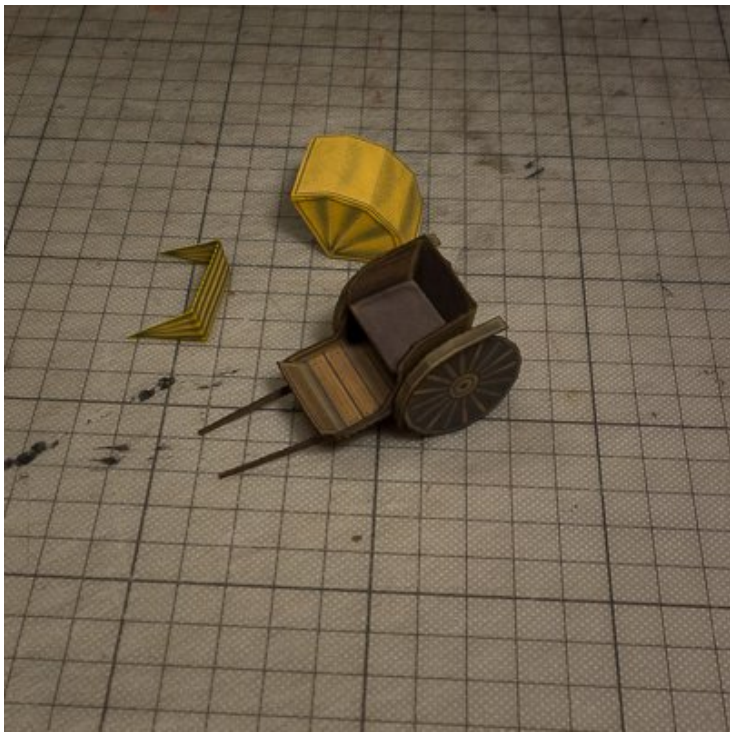

You have the option for a closed cloth roof. Prepare this part and glue and fold. You now have a closed and open roof.

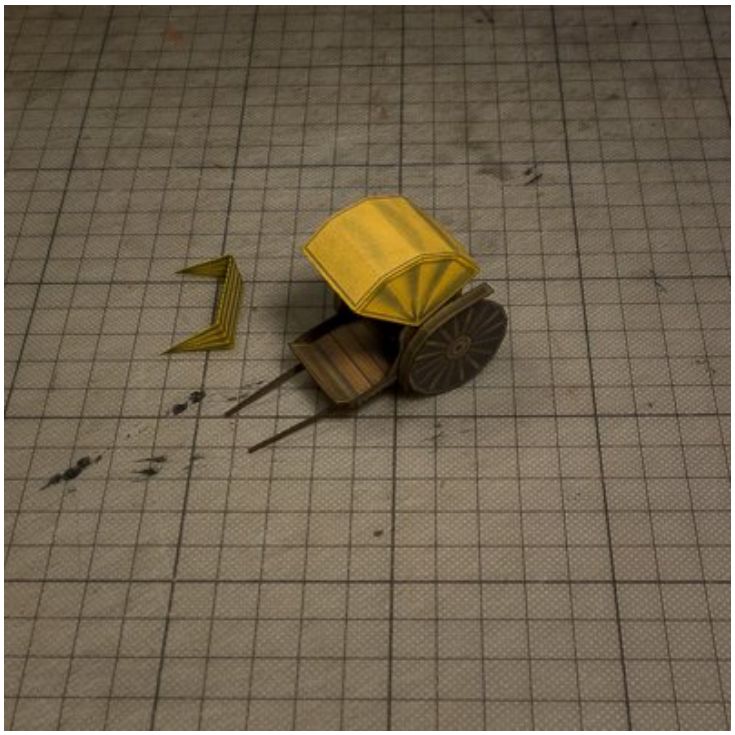

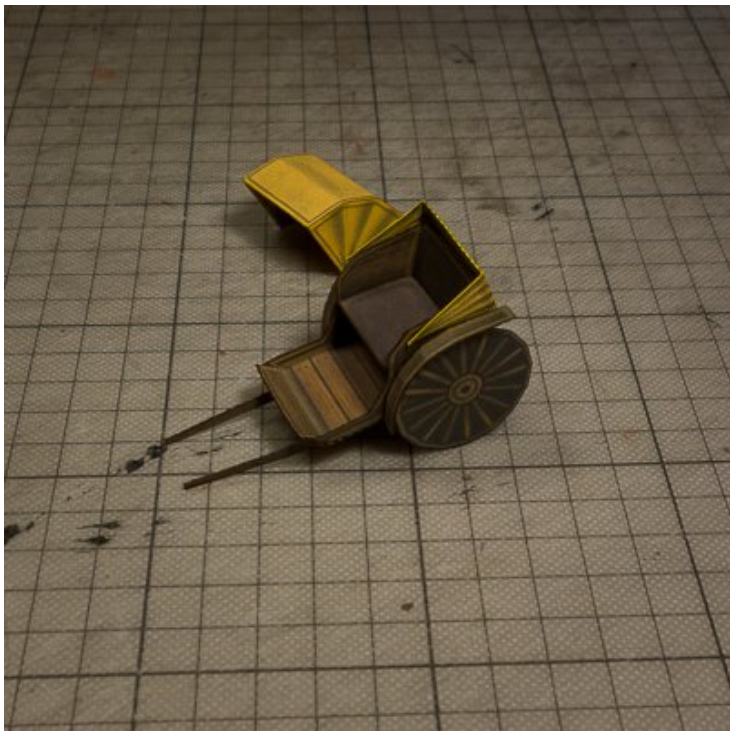

Use whatever option you like best!